# **CAMSO TLH 592S**





# FLAT-FREE PERFORMANCE AND VALUE

A heavy-duty flat-free telehandler tire solution. Fully predictable lifetime, it delivers optimized stability, traction and value.

## **PERFORMANCE**

PUNCTURE RESISTANCE
TRACTION



**CAMSO TLH 592S** 



#### **ENGINEERED SOLID TIRE SOLUTION**

 Provides flat-free operation and ultimate durability

#### **EXTRA-DEEP DIRECTIONAL TREAD DESIGN**

■ Increases tread life and off-road traction

#### PATENTED TRIANGULAR APERTURE GEOMETRY


Optimizes stability, strength and comfort

#### STEPPED TREAD DESIGN

Enhances cleanout for improved off-road traction

TIRE SIZE	HEEL WIDTH	RIM SIZE	TIRE DIMENSIONS			LOAD CAPACITY			
			O.D. [mm] <i>[in]</i>	O.W. [mm] <i>[in]</i>	0.T.D. [mm] [32nd]	Static	6 km/h 4 mph	10 km/h 6 <i>mph</i>	25 km/h 16 mph
13.00-24	8.50	8.50V-24	1260	310	51	9625	7650	6950	6375
			49.6	12.2	64	21250	16900	15350	14050
14.00-24	8.50	8.50V-24	1315	330	61	10645	8460	7685	7050
			51.8	13.0	77	23500	18700	16950	15550

### PERFORMANCE COMPARISON

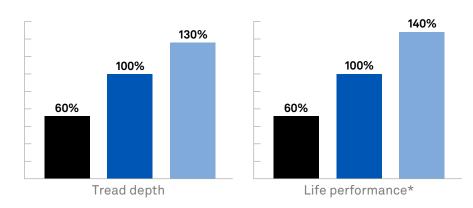

Standard Foam-Filled

Camso TLH 592S

Camso TLH 792S

Camso TLH 592S offers a cost-effective replacement tire optimizing uptime and return on investment. It provides all the benefits of a solid tire solution such as stability, resistance to cuts and chunking and durability while maintaining an affordable price.

AUTHORIZED DISTRIBUTOR:

camso.co



<sup>\*</sup> Estimated results, may vary depending on application