

CAMSO SKS 792S



SKID STEER
LOADERS



FLAT-PROOF DURABILITY MEETS OFF-ROAD TRACTION

The best off-road solid tire solution for skid steer loaders. Provides pneumatic comfort with zero flat tires and enhanced traction at the lowest operating cost.

camso.co

PERFORMANCE

TIRE LIFE



PUNCTURE RESISTANCE



TRACTION



CAMSO SKS 792S



HAULER STEPPED TREAD DESIGN

- Provides excellent cleanout for improved off-road traction

FEA-VALIDATED APERTURE DESIGN

- Improves ride quality and reduces cracking


REUSABLE WHEEL

- Provides lower cost per hour and quicker installation




TIRE SIZE	RIM SIZE	ACTUAL TIRE DIMENSIONS			HEEL		LOAD CAPACITY [kg] [lb]							
							Counterbalanced lift trucks			Other vehicles			Static	
		O.D. [mm] [in]	O.W. [mm] [in]	O.T.D. [mm] [32nd]	Normal	Quick	Load wheel		Steering wheel		6 km/h 4 mph	10 km/h 6 mph		25 km/h 16 mph
							15 km/h 9 mph	25 km/h 16 mph	25 km/h 16 mph	25 km/h 16 mph				
27x10-12 (250/75-12)	8.00G	680	241	31	-	■	-	3900	3000	3900	3540	3000	4530	
		26.8	9.5	39	-	■	-	8600	6615	8600	7805	6615	9985	
31x10-20 (10-16.5)	7.50	781	237	33	-	■	-	4030	3100	4030	3660	3100	4680	
		30.7	9.3	42	-	■	-	8885	6835	8900	8100	6850	10350	
33x12-20 (12-16.5)	7.50	831	287	40	-	■	-	5200	4000	5200	4720	4000	6040	
		32.7	11.3	50	-	■	-	11465	8820	11500	10400	8850	13350	
36x14-20 (14-17.5)	7.50	910	320	43	-	■	-	6175	4750	6175	5605	4750	7175	
		35.8	12.6	54	-	■	-	13650	10500	13650	12350	10500	15850	

FEA-ENGINEERED APERTURE DESIGN

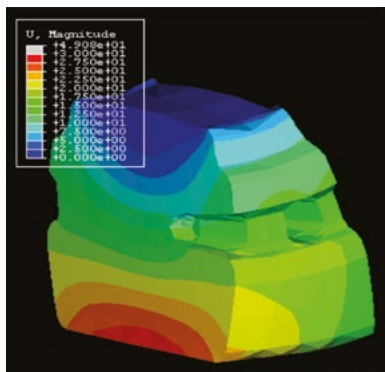

VERTICAL DEFLECTION TESTING

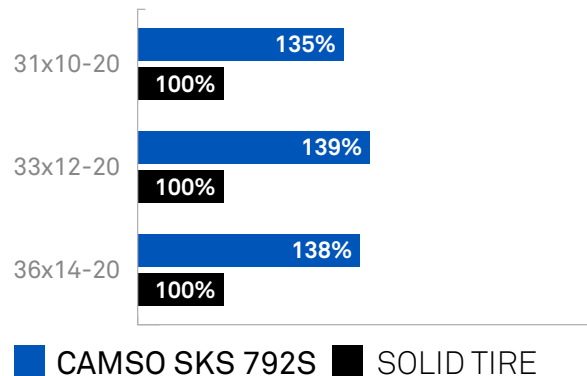

Shows minimized stress around aperture holes for better resistance to cracking.

Demonstrates enhanced deflection for improved ride quality and comfort.

