

# CAMSO BHL 753

FORMERLY SOLIDEAL BHZ



BACKHOE  
LOADERS



## DURABILITY MEETS RIDE QUALITY

Thoroughly designed to ensure even tread wearing and reduce vibrations. Comfort and long tire life combined.

## PERFORMANCE

TIRE LIFE



PUNCTURE RESISTANCE




TRACTION



[camso.co](http://camso.co)



# CAMSO BHL 753



**NON-DIRECTIONAL TREAD PATTERN WITH HIGH LUG-TO-VOID RATIO**

- Ensures even tread wearing for greater durability

**OPTIMIZED, CONTINUOUS-CONTACT TREAD PATTERN**

- Significantly reduces vibration for improved ride quality



**NON-DIRECTIONAL TREAD PATTERN WITH HIGH LUG-TO-VOID RATIO**


- Protects against tread impacts and punctures

**TAPERED TREAD LUGS**


- Improves lug stability for even wearing

TIRE SIZE	PR	TT/TBLS	RIM SIZE		ACTUAL TIRE DIMENSIONS			LOAD INDEX	SPEED SYMBOL	INFLATION PRESSURE [bar] [PSI]	APPLICATION	MAXIMUM TIRE LOAD [kg] [lb]				
			Recommended	Alternative	O.D. [mm] [in]	O.W. [mm] [in]	O.T.D. [mm] [32nd]					Static	8 km/h 5 mph	16 km/h 10 mph	40 km/h 25 mph	50 km/h 30 mph
12-16.5	12	TBLS	9.75	-	826	319	18	145	A2	5.60	-	4550	2880	2280	-	-
					32.5	12.6	23			10050		6350	5050	-	-	
12.5/80-18 (320/80-18)	12	TBLS	W9x18	11x18	984*	310*	24*	129	A6	3.70	Drive	4375	2410	2240	1665	-
					38.7	12.2	30			9650		5300	4950	3700	-	
		TBLS			984*	310*	24*	142	A6	3.70	Free rolling	4375	3450	3205	2385	-
					38.7	12.2	30			9650		7600	7100	5250	-	
19.5L-24 (500/70-24)	12	TBLS	DW16Ax24	W16x24	1316*	503*	25*	151	A8	2.30	Cyclic	7935	5240	4625	3450	3140
					51.8	19.8	31			17500		11550	10200	7600	6950	
		TBLS			1316*	503*	25*	151	A8	2.30	Constant	7935	4450	3900	3450	3140
					51.8	19.8	31			17500		9800	8600	7600	6950	
18.4-26 (480/80-26)	12	TBLS/TT	W16Lx26	DW16A. W15Lx26	1418*	482*	26*	156	A8	2.50	Cyclic	9200	5840	5360	4000	3640
					55.8	19.0	33			20300		12900	11850	8850	8050	
		TBLS/TT			1418*	482*	26*	156	A8	2.50	Constant	9200	4830	4520	4000	3640
					55.8	19.0	33			20300		10650	10000	8850	8050	
16.9-28 (440/80-28)	12	TBLS/TT	W15Lx28	W14Lx28	1404*	445*	28*	152	A8	2.60	Cyclic	8165	5180	3800	3550	3230
					55.3	17.5	35			18000		11450	8400	7850	7150	
		TBLS/TT			1404*	445*	28*	152	A8	2.60	Constant	8165	4290	3690	3550	3230
					55.3	17.5	35			18000		9450	8150	7850	7150	

**MASSIVE UNDERTREAD CONNECTING CENTER LUGS**

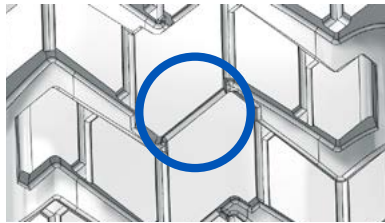

Vibration performance

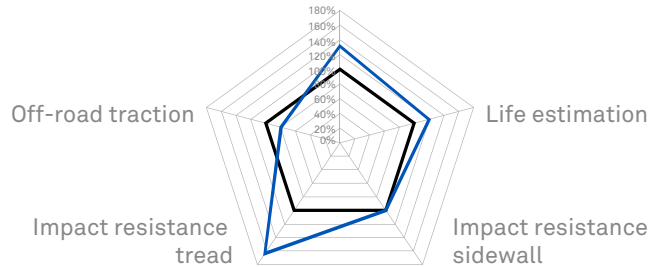

- CAMSO BHL 753
- COMPETITOR

AUTHORIZED DISTRIBUTOR:

[camso.co](http://camso.co)



FORMERLY CAMOPLAST SOLIDEAL